




200排水口
200 Drain Port



300-400排水口
300-400 Drain Port

Model	FRC-200	FRC-300	FRC-400
Module	FR-200	FR-300	FR-400
	L-200	L-300	L-400
Port Size	G1/4	G3/8	G1/2
Working Media	Compressed Air		
Pressure Range	0.05~1.2MPa		
Max. Proof Pressure	1.6MPa		
Filter Precision	40 μ m(Normal)or 5 μ m(Customized)		
Rated Flow	1000L/min	2000L/min	2600L/min
Min. Fogging Flow	3L/min	6L/min	6L/min
Water Cup Capacity	22ml	43ml	43ml
Suggested Lubricating Oil	Oil ISO VG32 or equivalent		
Ambient Temperature	5-60°C		
Fixing Mode	Tube Installation or Bracket Installation		
Material	Body : Zinc alloy ; Cup : PC ; Protective Cover:Aluminum alloy		

Dimension

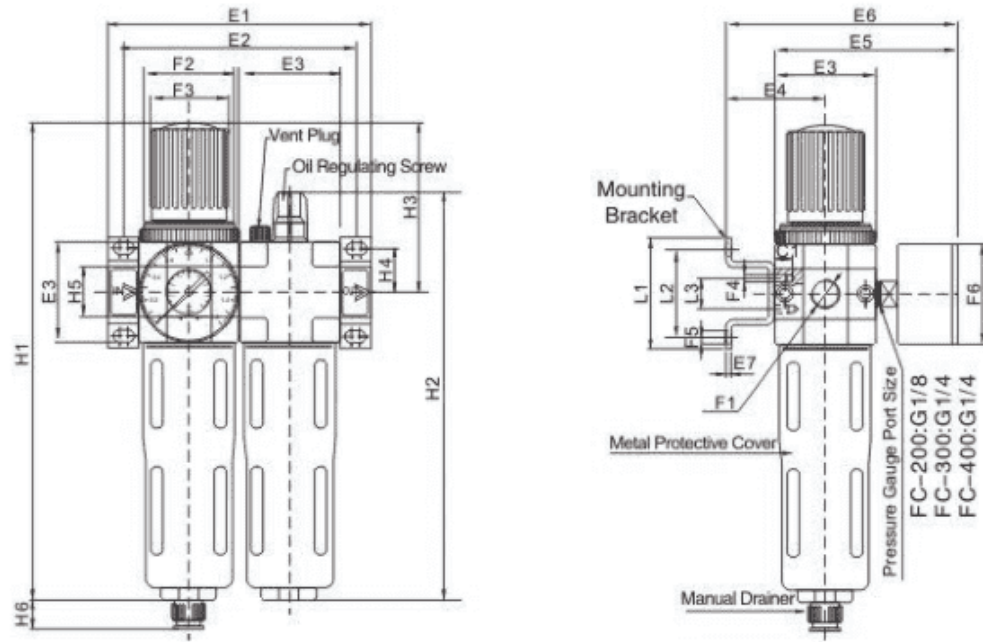

Model	E1	E2	E3	E4	E5	E6	E7	F1	F2	F3 φ	F4	F5 φ	F6 φ	L1	L2	L3	H1	H2	H3	H4	H5	H6
FRC-200	104	92	40	39	76	95	2	G1/4	M36x 1.5	31	M4	4.5	40	44	35	11	194	169	69	17.5	20	15
FRC-300	140	125	55	47	93	112	3	G3/8	M52x 1.5	50	M5	5.5	52	71	60	22	250	206	98	24.5	32	15
FRC-400	140	125	55	47	93	112	3	G1/2	M52x 1.5	50	M5	5.5	52	71	60	22	250	206	98	24.5	32	15