


U Series
Lubricator

Symbol



Features

- 1. Lubricator oil can be replenished without stopping air supply.
- 2. Oil spray in mist ensures good lubrication for machines.



*Lubricator oil (Recommended): ISO-VG32

How to order

UL	02	N	B	A
Lubricator	Port size	Thread	Mounting	Bowl
	02 : 1/4" 03 : 3/8" 04 : 1/2" 06 : 3/4" 08 : 1"	Blank : G N : NPT R : Rc	Blank : W/O bracket B : W/I bracket	Blank : Standard bowl A : Anti-acid & alkali bowl AL : Aluminum bowl




https://www.markazbargh.com/?post_type=product&p=68718&preview=true

Specifications




Model	UL-02	UL-03	UL-04	UL-06	UL-08
Port size	1/4"	3/8"	1/2"	3/4"	1"
Fluid	Compressed air				
Body material	Aluminum die-cast				
Bowl material	Polycarbonate (Standard), Anti-acid & alkali bowl (Option), Aluminum bowl (Option)				
Operating pressure range	0.5 ~ 9.9 kgf/cm ²				
Proof pressure (Standard bowl)	15 kgf/cm ²				
Max. flow rate l/min (ANR)	2490	2525	4310	8400	9000
Ambient temperature	-10°C ~ 60°C				
Lubricator bowl capacity	125cc			235cc	
Net weight	500g (Al bowl 800g)			1095g (Al bowl 1445g)	
Option	Mounting bracket set				

Dimensions






UL-02, 03, 04

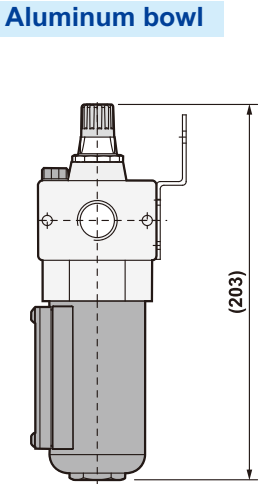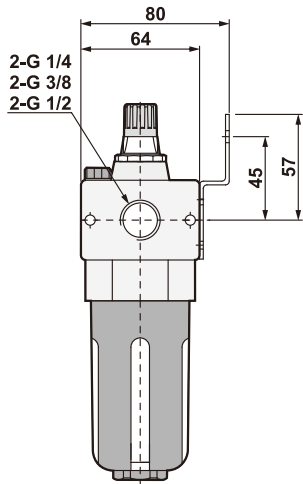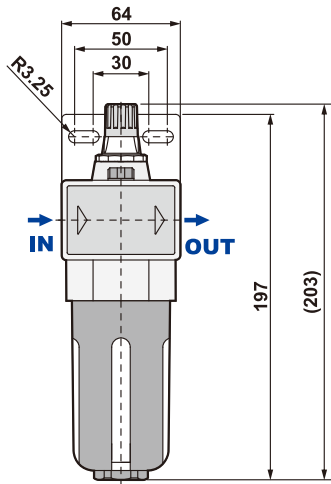

UL-06, 08

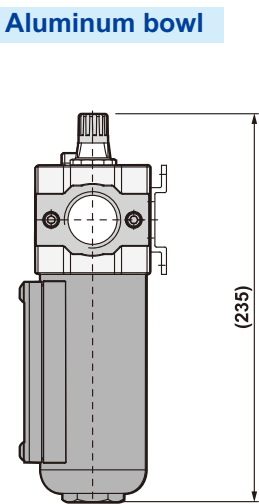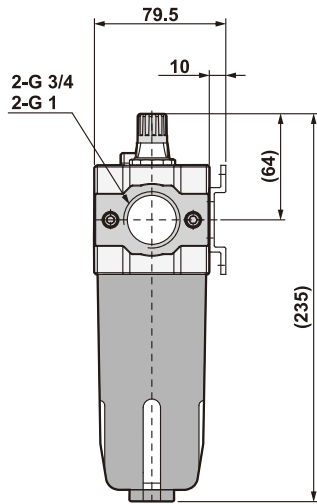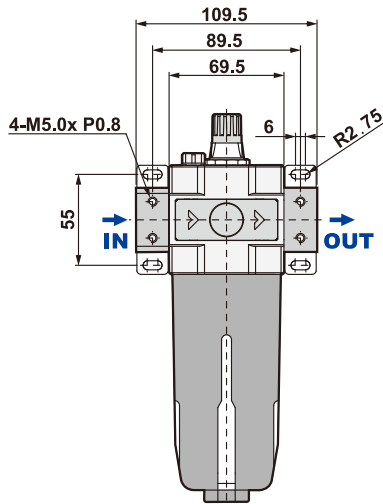

Flow chart



Note: X axis: Flow (l/min), Y axis: Pressure (kgf/cm²), Blue line (P0) = Outlet pressure, Black line (P1) = Inlet pressure, P1-P0= Pressure range