



CVSS SERİSİ AISI 316-L PASLANMAZ ÇEK VALFLER

Komple olarak AISI 316-L kalite paslanmaz çelikten imal edilen CVSS Serisi Çek Valfler, her türlü kimyasala ve korozyona karşı mükemmel dirence sahiptir. CVSS Serisi Çek Valfler, kısma noktalarının baypasında, akışkanın bir yönde engellenmesinde, tanka tahliye valfi olarak ve devrelerde belirli bir karşı basınç üretilmesi için ön gerilim (tutma) valfi olarak kullanılmaktadır. CVSS Serisi Paslanmaz Çek Valflerde açma basıncı standart olarak 0,5 Bar'dır. Özel olarak 6-8 Bar açma basıncılı paslanmaz çek valfler de stoklarımızda mevcuttur.



Malzeme	AISI 316-L kalite paslanmaz çelik
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	VİTON
Açma Basıncı	0,5 Bar (Özel hallerde isteğe bağlı 6-8 Bar açma basıncı opsiyonu)
Çalışma Sıcaklığı	-30 °C ile +225 °C
Özel Hallerde	EPDM (Buhar uygulamalarına özel)
Kullanım Alanı	6-8 Bar açma basıncılı yay Denizcilik, gıda, ilaç, medikal, kimya, sulama, kağıt, boya, tekstil, gaz ve havacılık

CVSS SERIES AISI 316-L STAINLESS STEEL CHECK VALVES


CVSS Series Check Valves are completely made of AISI 316-L stainless steel row material have an excellent Resistance to all kind of chemical and corrosion. CVSS Series Check Valves are also used for by-pass of throttle points, for flow prevention in one direction, for discharging valve and for hold valve. Opening pressure of CVSS Series Hydraulic Check Valves is 0,5 Bar. Upon request, 6-8 Bar opening Pressure is optional.



Material	AISI 316-L stainless steel
Thread Size	BSP (Upon Request: NPT, Metric)
Opening Pressure	0,5 Bar (6-8 Bar opening pressure is optional, open request)
Sealing	VITON
Working Temperature	-30 °C and +225 °C
Upon Request	EPDM (For steam application) Special spring for optional 6-8 Bar opening pressure
Applications	Marine, food, pharmacy, medical, chemical, irrigation, paper, paint, textile, gas and aviation



Açma basıncı 6 - 8 Bar olan hidrolik paslanmaz çek valflerimiz de stoklarımızda mevcuttur.

Stainless steel check valves of which cracking pressure is



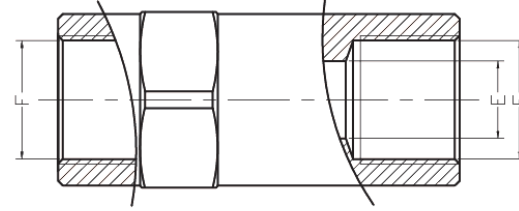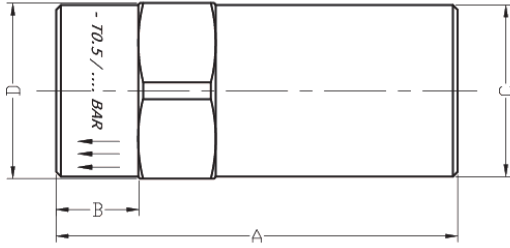

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) F	Açma Basıncı (Crack Pressure) Bar	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm				
				A	B	C	D	E
CVSSG18V	1/8" BSP	0.5	580	46,50	9	14,50	15	5
CVSSG14V	1/4" BSP	0.5	450	55	10	18,50	19	7,20
CVSSG38V	3/8" BSP	0.5	450	60	11	21,50	22	9,50
CVSSG12V	1/2" BSP	0.5	400	70	12	26	27	11,60
CVSSG34V	3/4" BSP	0.5	380	83	17	35	36	16
CVSSG1V	1" BSP	0.5	350	98	20	40	41	19
CVSSG114V	1 1/4" BSP	0.5	350	110	21	49	50	24,50
CVSSG112V	1 1/2" BSP	0.5	280	115	22	58	60	31,50
CVSSG2V	2" BSP	0.5	260	130	25	73	75	42

Debi / Basınc Değişimi Tablosu Flow Rate / Pressure Drop Table

Kod (Code)	Vida Ölçüsü (Thread Size)	Basınc Değişimi (Pressure Drop) - Δ p		
		1 Bar	2 Bar	5 Bar
CVSSG18V	1/8" BSP	10	14	23
CVSSG14V	1/4" BSP	16	25	36
CVSSG38V	3/8" BSP	25	38	70
CVSSG12V	1/2" BSP	50	70	130
CVSSG34V	3/4" BSP	115	170	320
CVSSG1V	1" BSP	160	255	430
CVSSG114V	1 1/4" BSP	240	365	650
CVSSG112V	1 1/2" BSP	340	475	800
CVSSG2V	2" BSP	750	1025	1680

